

HVAC TAPES





HVAC Tape Products

Manufactured by IPG® in the USA for the HVAC Market

Intertape Polymer Group® offers a complete line of products specifically engineered to meet the most stringent requirements of the HVAC industry. From our dead soft aluminum foil tapes and metallized film tapes to our extensive industrial tape and films product offering, IPG® has your solution!





FEATURES & BENEFITS

- Products engineered for a wide range of applications and environments
- UL-listed products to meet building and construction codes
- Water, smoke and mold-resistant products
- Moisture barrier products for use on foil jacketing insulation
- IPG® HVAC products can help increase efficiency and meet sustainability goals by minimizing air distribution loss

Tape properties available online at www.itape.com



LEED® Contributions for Low Volatile Organic Compounds (VOC)





Leadership in Energy & Environmental Design (LEED®) is a rating system based on points accumulated across six categories: Sustainable Sites, Energy & Atmosphere, Materials & Resources, Indoor Environmental Quality, Water Efficiency, and Innovation. IPG® products with the **Low VOC Level 2** icon can help contribute towards points in LEED® building projects for two of these categories; "Energy & Atmosphere" and "Indoor Environmental Quality" standards. These products can help increase the overall energy efficiency of a building with products containing low to zero VOC. Look for the **Low VOC Level 1** icon for IPG® products that can help contribute towards points in one category; "Indoor Environmental Quality" standards.









| Item Number | Imperial Size | Metric Size | Unit UPC | Resource Number | Rolls/ Pack | Rolls/ Case |
|----------------|---------------|----------------|-----------------|-----------------|----------------|----------------|
| 5010-B | 2.5in × 60yds | 63.5mm × 54.8m | 0-87143-00222-1 | 99607 | 1 | 12 |
| 5011 | 3in x 60yds | 76.2mm x 54.8m | 0-77922-00115-6 | ALF201LUL360HR | 1 | 16 |



- Designed to be used on duct board and flexible duct systems where UL181A-P and UL181B-FX standards are required
- Cold weather adhesive that works great in extreme temperatures
- Printed in red for easy identification

MEMBER:

ACCA (Air Conditioning Contractors of America)
ADC (Air Diffusion Council)
HARDI (Heating, Air-conditioning & Refriferation Distributors International)
IAQA (Indoor Air Quality Association)

ICC (International Code Council)
IHACI (Institute of Heating & Air Conditioning Industries, Inc.)
PSTC (Pressure Sensitive Tape Council)















HVAC Foil Tapes





| ALFITSL C | OLD WEATHEN ALC | JIVIIINOIVI FOIL TAPE | WIII LINEN | | | |
|----------------|-----------------|-----------------------|-----------------|--------------------|----------------|----------------|
| Item Number | Imperial Size | Metric Size | Unit UPC | Resource Number | Rolls/ Pack | Rolls/ Case |
| 9502-B | 2.0in x 50yds | 50.9mm x 45.7m | 0-77922-00123-1 | 99606 | 1 | 12 |
| 9503 | 3.0in x 50yds | 76.2mm x 45.7m | 0-77922-00124-8 | ALF175L0350HR | 1 | 16 |

- Cold weather acrylic tape for seaming, patching and sealing
- Vapor barrier integrity, flame retardance, high shear adhesion, UV resistance, and superior bonding in subzero or elevated temperatures
- For use in Industrial and HVAC applications
- Tested in accordance with UL-723 (ASTM E-84)



ALF150L GENERAL PURPOSE ALUMINUM FOIL TAPE WITH LINER

| 17 | W |
|----|---|
| | |

| Item Number | Imperial Size | Metric Size | Unit UPC | Resource Number | Rolls/ Pack | Rolls/ Case |
|----------------|---------------|-----------------|-----------------|--------------------|----------------|----------------|
| 9202-B | 2.0in x 50yds | 50.8mm x 45.7m | 0-77922-76193-7 | 99605 | 1 | 12 |
| 9203 | 3.0in x 50yds | 76.2mm x 45.7m | 0-77922-77113-4 | 77113 | 1 | 16 |
| 5677 | 4.0in x 50yds | 101.6mm x 45.7m | 0-77922-85677-0 | 5677 | 1 | 12 |

- Dead soft aluminum foil tape for seaming and sealing fiberglass duct board and duct wrap
- High tack rubber based adhesive
- Recommended minimum application temperature 40°F (4°C)
- Shiny aluminum backing offers excellent reflective properties (i.e. heat, light)
- Tested in accordance with UL-723 (ASTM E-84)



FSK JACKETING TAPE FOIL-SCRIM INSULATION TAPE



| Item Number | Imperial Size | Metric Size | Unit UPC | Resource Number | Rolls/Pack | Rolls/ Case |
|----------------|----------------|---------------|-----------------|--------------------|------------|----------------|
| FSK3-HC | 2.95in x 50yds | 75mm × 45.72m | 0-77922-99712-1 | 99712 | 1 | 12 |

- Engineered to seam/seal FSK duct board and insulation to enhance appearance and maintain vapor barrier integrity
- Aggressive acrylic pressure-sensitive adhesive provides long-lasting adhesion to clean/dry surfaces
- Full bond within 24 hours
- Remains flexible to resist cracking and lifting
- Resistant to mold and mildew
- Release coated kraft liner
- Tested in accordance with UL-723 (ASTM E-84)



ALF MASTIC SPECIALTY BUTYL MASTIC FOIL TAPE



| Item Number | Imperial Size | Metric Size | Unit UPC | Resource Number | Units/ Pack | Units/ Case |
|----------------|----------------|--------------|-----------------|--------------------|----------------|----------------|
| MF2100 | 1.88in × 100ft | 48mm × 30.4m | 0-77922-99631-5 | 99631 | 1 | 12 |
| MF3100 | 2.88in × 100ft | 73mm × 30.4m | 0-77922-99632-2 | 99632 | 1 | 12 |

- High tack, low VOC 17 mil aluminum 'mastic' foil tape coated with a pressure-sensitive, modified butyl rubber adhesive
- Provides an instant waterproof grip to a variety of surfaces and providing full bond within 24 hours
- Excellent flexibility, no cracking, highly resistant to the effects of weather, UV, temperature, mold and mildew
- LEED points contributor
- Easy release liner
- Tested in accordance with UL-723 (ASTM E-84)

HVAC Cloth Duct Tapes



AC49 MEDIUM 11 MIL METALIZED DUCT (UL-723 RATED)



| ltem Number | Imperial Size | Metric Size | Unit UPC | Resource Number | Rolls/ Pack | Rolls/ Case |
|----------------|----------------|--------------|-----------------|--------------------|----------------|----------------|
| AC4948 | 1.88in × 60yds | 48mm × 54.8m | 0-77922-82764-0 | 82764 | 1 | 24 |

- Metalized PE film applied to high tensile cloth with an aggressive pressure sensitive natural rubber adhesive
- Designed for applications where a high quality grade of cloth tape is required and the appearance of metalized backing is preferred
- Meets HUD, BOCA and LA County codes
- Tested in accordance with UL 723 (ASTM E-84)



AC36 MEDIUM 11 MIL DUCT TAPE (UL-723 RATED)



| Item Number | Imperial Size | Metric Size | Unit UPC | Resource Number | Rolls/ Pack | Rolls/ Case |
|----------------|----------------|--------------|-----------------|--------------------|----------------|----------------|
| 4137 (silver) | 1.88in × 60yds | 48mm × 54.8m | 0-77922-84137-0 | 4137 | 1 | 24 |
| 4382 (black) | 1.88in × 60yds | 48mm × 54.8m | 0-77922-84382-4 | 4382 | 1 | 24 |
| 4335 | 1.88in × 60yds | 48mm × 54.8m | 0-77922-84335-0 | 4335 | 1 | 24 |

- The general contractor's duct tape of choice
- PE coated cloth tape with an aggressive system designed to provide exceptional shear strength for demanding applications such as HVAC, abatement, weatherproofing, extermination, flex duct connections and all general maintenance needs
- Meets HUD, BOCA and LA County codes
- Tested in accordance with UL 723 (ASTM E-84)



AC45 DUCT TAPE MEDIUM 12 MIL DUCT

| Item Number | Imperial Size | Metric Size | Unit UPC | Resource Number | Rolls/ Pack | Rolls/ Case |
|----------------|----------------|--------------|-----------------|--------------------|----------------|----------------|
| 4138 | 1.88in × 60yds | 48mm × 54.8m | 0-77922-84138-7 | 4138 | 1 | 24 |

- PE coated cloth film with an aggressive adhesive
- Wide temperature range
- Recommended for use where high adhesion and conformability are required
- Meets HUD and BOCA Codes and LA County codes
- Tested in accordance with UL 723 (ASTM E-84)



AC50 DUCT TAPE PREMIUM 14 MIL DUCT



| Item Number | Imperial Size | Metric Size | Unit UPC | Resource Number | Rolls/ Pack | Rolls/ Case |
|----------------|----------------|--------------|-----------------|--------------------|----------------|----------------|
| 4139 | 1.88in × 60yds | 48mm × 54.8m | 0-77922-84139-4 | 84139 | 1 | 24 |

- High tensile and tear strength
- Maximum performance for sealing heating and air ventilation systems
- Meets HUD, BOCA, and LA County codes
- Tested in accordance with UL 723 (ASTM E-84)



IRON GRIP™ PREMIUM DUCT TAPE



| Item Number | Imperial Size | Metric Size | Unit UPC | Resource Number | Rolls/ Pack | Rolls/ Case |
|----------------|----------------|-------------|------------------|--------------------|----------------|----------------|
| IG235 | 1.88in × 35yds | 48mm × 32m | 0-77922-99580-6 | 99580 | 1 | 12 |
| IG2PK-A | 1.88in × 35yds | 48mm × 32m | 0-77922-99558-13 | 99634 | 2 | 12 |

- Tested in accordance with UL 723 (ASTM E-84)
- All-weather, easy unwind, high adhesion
- Professional quality, ultra-tough 17 mil
- Black



Tape & Specialty Products



AC778 PREMIUM BOPP HVAC TAPE

| Item Number | Imperial Size | Metric Size | Resource Number | Rolls/ Pack | Rolls/ Case |
|----------------|----------------|--------------|-----------------|----------------|----------------|
| AC778 | 1.88in × 60yds | 48mm × 54.8m | 87789 | 1 | 36 |

- BOPP metalized film tape with acrylic adhesive for superior sealing, protecting and ease of handling
- Designed for splicing and repairing insulation
- Tested in accordance to UL-723/ASTM E-84



SHEATHING TAPE

| Item Number | Imperial Size | Metric Size | Unit UPC | Resource Number | Rolls/ Pack | Rolls/ Case | Color |
|----------------|------------------|-------------|-----------------|--------------------|----------------|----------------|---------------------|
| 5518USW | 1.88in × 54.6yds | 48mm × 50m | 0-77922-85518-6 | 85518 | 1 | 24 | White |
| 5561USR | 1.88in × 54.6yds | 48mm × 50m | 0-77922-85561-2 | 85561 | 1 | 24 | Red |
| 5563USR | 2.83in × 54.6yds | 72mm × 50m | 0-77922-85563-6 | 85563 | 1 | 16 | Red |
| 5560CNDR | 2.36in × 72.1yds | 60mm × 66m | 0-77922-85889-7 | 91377 | 1 | 20 | Red/Black (CCMC) |
| ST3PK | 1.88in × 54.6yds | 48mm × 50m | 0-77922-99653-7 | 99653 | 3 | 24 | Red |

- Designed for permanent seaming and sealing of joints in foam insulation & housewrap
- Secures lap edges on house wraps and other vapor barriers, repairs rips and tears in roll and batt insulation, construction films and membranes
- Available in white, red, and CCMC certified red



AC50 SPRAY ADHESIVE



| Item Number | Net Weight | Unit UPC | Resource Number | Units/ Pack | Units/ Case |
|----------------|---------------------------|-----------------|-----------------|----------------|----------------|
| AC 50 | 12 fluid oz. (.50 liters) | 0-77922-82758-9 | 82758 | 1 | 12 |

- Designed to assist bonding to several surfaces, which include wood, concrete and sheet metal
- Contains no methyl chloride or CFCs
- 41 PSI shear strength
- Fast tack pressure sensitive adhesive
- Not intended for use in California



VINYL ELECTRICAL TAPE 7 MIL MEDIUM GRADE

| Item Number | Imperial Size | Metric Size | Unit UPC | Resource Number | Rolls/Pack | Rolls/ Case |
|----------------|---------------|--------------|-----------------|--------------------|------------|----------------|
| 607 | .75in × 66ft | 19mm × 20.1m | 0-77922-85515-5 | 85835 | 10/20 | 120 |

- Black vinyl electrical insulating tape consisting of a soft "plasticized" stabilized PVC film coated with a non-corrosive rubber based adhesive
- For use in general purpose maintenance and repair
- CSA and UL listed
- Good dielectric strength
- Temperature range is 0°C to 80°C; lead free



PRO•MASK BLUE® DESIGNER 14-DAY PAINTERS TAPE

| Item Number | Imperial Size | Metric Size | Unit UPC | Resource Number | Rolls/ Pack | Rolls/ Case |
|----------------|----------------|--------------|-----------------|--------------------|----------------|----------------|
| PMD48 | 1.88in × 60yds | 48mm × 54.8m | 0-77922-99557-8 | 99557 | 1 | 16 |

- Provides 14-day UV resistance
- Removes cleanly from painted walls, trim, glass and metal

Tape & Specialty Products



THREADSEAL TAPE

| Item Number | Imperial Size | Metric Size | Unit UPC | Resource Number | Rolls/Pack | Rolls/ Case |
|-------------|---------------|----------------|-----------------|--------------------|------------|----------------|
| 11 1/2X260 | 0.5in × 260in | 12.7mm × 6.6m | 0-77922-85740-1 | 11 1/2X260 | 200/6 | 1200 |
| 11 1/2X520 | 0.5in × 520in | 12.7mm × 13.2m | 0-77922-85738-8 | 11 1/2X520 | 200/6 | 1200 |

- Made of chemically inert material; withstands alkalies, acids, oils and solvents
- Use on iron, stainless steel, copper, brass, plastic, glass or rubber pipes
- Has a temperature resistance of -400°F to 700°F



GAFFERS TAPE



| Item Number | Imperial Size | Metric Size | Unit UPC | Resource Number | Rolls/ Case | Color |
|-------------|------------------|-------------|-----------------|--------------------|----------------|-------|
| 5638BLK | 1.87in x 54.7yds | 48mm x 50m | 0-77922-85638-1 | 5638 | 24 | Black |

- Cloth tape for bundling and holding wires and cables in place
- Non-reflective matte finish
- Hand tearable and conforms to irregular surfaces
- Weather and abrasion resistant
- Special adhesive for clean removal



8100 CARTON SEALING TAPE

| Imperial Size | Metric Size | Roll Type | Case UPC | Resource Number | Rolls/ Case |
|-------------------|-------------|-----------|-----------------|--------------------|----------------|
| 1.88in x 109.3yds | 58mm x 100m | Hand | 500-35694415002 | F4150 | 36 |

• Hot melt BOPP carton sealing tape for medium to heavy weight usage, manual or automatic box sealing, package repair, bundling, and packages exposed to normal shipping hazards and stress.



HAND WRAP STRETCH FILM

| Item Number | Imperial Size | Metric Size | Unit UPC | Resource Number | Gauge | Rolls/ Pack | Rolls/ Case |
|-------------------|---------------|----------------|-------------------|--------------------|-------|----------------|----------------|
| 4349 | 20in × 1000ft | 508mm × 304.8m | 0-77922-84349-7 | HG2032000-RT | 80 | 1 | 4 |
| SF1515MA | 15in × 1500ft | 381mm × 457m | 0-77394-91205-5 | SF1515MA | 80 | 1 | 4 |
| SF1815MA | 18in × 1500ft | 457mm × 457m | 0-77394-91168-4 | SF1815MA | 80 | 1 | 4 |
| 4349DIS | 20in × 1000ft | 508mm × 304.8m | 5-00779-22994-194 | 99419 | 80 | 9 | 9 |
| With Brake Handle | | | | | | | |
| 2010BH | 20in × 1000ft | 508mm × 304.8m | 0-77922-99583-7 | 99583 | 80 | 1 | 4 |

- Great for wrapping items in groupings
- Sticks only to itself



RG300 REINFORCED STRAPPING TAPE


| Item Number | Imperial Size | Metric Size | Unit UPC | Resource Number | Rolls/ Case |
|-------------|----------------|--------------|-----------------|-----------------|----------------|
| 9716 | .94in X 60 yds | 24mm x 54.8m | 0-77922-76192-0 | 91404 | 33 |

- Fiberglass reinforced tape designed for the majority of packaging, palletizing and unitizing applications
- Polypropylene backing and aggressive adhesive provides excellent adhesion strength



CORPORATE PROFILE

Intertape Polymer Group® Inc. (IPG®) is a recognized leader in the development, manufacture and sale of a variety of paper and film based pressure-sensitive and water-activated tapes, polyethylene and specialized polyolefin films, woven coated fabrics and complementary packaging systems for industrial and retail use. Headquartered in Montreal, Quebec and Sarasota, Florida, the Company employs approximately 2,500 employees with operations in 19 locations, including 13 manufacturing facilities in North America and one in each of Europe and Asia.

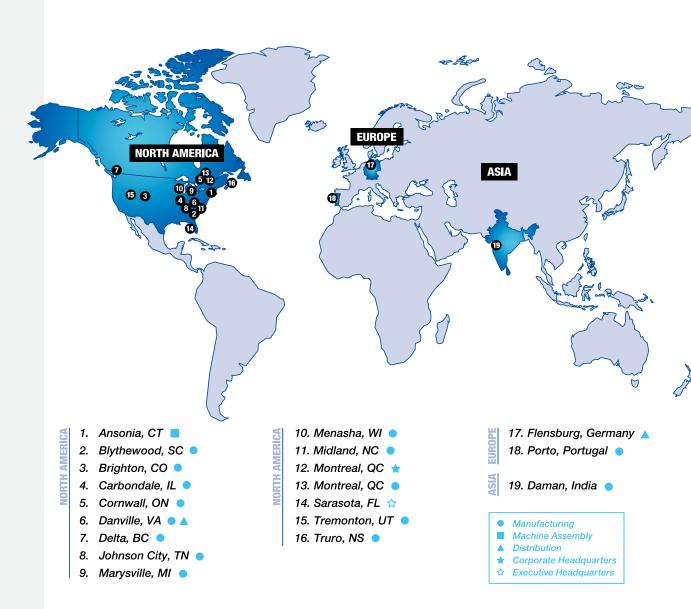

888-898-7834

www.itape.com | Tech Help: 877-447-4832 | info@itape.com











